



REC'D 08 DEC 2004
WIPO PCT



IB/2004/052565

**INVESTOR IN PEOPLE**

**The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ**

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.


Signed

Q. Hamey

Dated 2 September 2004

**PRIORITY
DOCUMENT**

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)



The
Patent
Office
□□□□

1/77

request for grant of a patent
see notes on the back of this form. You can
also get an explanatory leaflet from the Patent
Office to help you fill in this form)

The Patent Office
Cardiff Road
Newport
Gwent NP10 8QQ

Your reference

PHGB 030214GBP

01DEC03 E856115-5 002879

P01/7700 0.00-0327794.4

Patent application number
(The Patent Office will fill in this part)

29 NOV 2003

0327794.4 ✓

Full name, address and postcode of the or of
each applicant (underline all surnames)

KONINKLIJKE PHILIPS ELECTRONICS N.V.
GROENEWOUDSEWEG 1
5621 BA EINDHOVEN
THE NETHERLANDS
07419294001 ✓

Patents ADP Number (if you know it)

If the applicant is a corporate body, give the
country/state of its incorporation

THE NETHERLANDS

Title of the invention

POSITIONING METHOD AND APPARATUS

Name of your agent (if you have one)
"Address for service" in the United Kingdom
to which all correspondence should be sent
(including the postcode)

Philips Intellectual Property and Standards
Cross Oak Lane
Redhill
Surrey
RH1 5HA
08359655001 ✓

Patents ADP number (if you know it)

If you are declaring priority from one or more
earlier patent applications, give the country
and the date of filing of the or of each of these
earlier applications and (if you know it) the or
each application number

Country

Priority Application number
(if you know it)

Date of filing
(day/month/year)

If this application is divided or otherwise
derived from an earlier UK application, give
the number and the filing date of the earlier
application

Number of earlier application

Date of filing
(day/month/year)

Is a statement of inventorship and of right to
grant of a patent required in support of this
request? (Answer "Yes" if:

YES

- a) any applicant named in part 3 is not an inventor, or
- b) there is an inventor who is not named as an
applicant, or
- c) any named applicant is a corporate body.
See note (d))

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form.
Do not count copies of the same document.

Continuation sheets of this form

Description	10
Claims(s)	4
Abstract	1
Drawings	2

10. If you are also filing any of the following, state how many against each item:

Priority Documents

Translations of priority documents

Statement of inventorship and right

to grant of a patent (*Patents Form 7/77*)

Request for preliminary examination and
search (*Patents Form 9/77*)

Request for substantive examination


(*Patents Form 10/77*)

Any other documents

(*Please specify*)

I/We request the grant of a patent on the basis of this application.

Signature



Date 28/11/2003

Name and daytime telephone number of
person to contact in the United Kingdom

01293 815438

(A. G. WHITE)

ring

If an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been refused.

s

If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.

Write your answers in capital letters using black ink or you may type them.

If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.

If you have answered "Yes" *Patents Form 7/77* will need to be filed.

Once you have filled in the form you must remember to sign and date it.

For details of the fee and ways to pay please contact the Patent Office

DESCRIPTION

POSITIONING METHOD AND APPARATUS

The present invention relates to a positioning method and apparatus.

5

Time-of-arrival radio location systems, for example as described in US Patent No. 5,764,686, utilise correlation techniques but these position processing methods are not well suited to densely populated environments with high levels of multi-path degradation.

10

An object of the present invention is to provide a positioning method that provides accurate and robust positioning measurements.

Another object of the present invention is to provide a positioning method that operates effectively in a wide variety of environments.

15

Another object of the present invention is to provide a positioning method that is effective in a wide variety of signal conditions.

Another object of the present invention is to provide a positioning method that is readily operable in rapidly changing environments and/or signal conditions.

20

Another object of the present invention is to reduce the processing required for positioning.

Another object of the present invention is to provide a fast and effective positioning method.

25

According to the present invention, there is provided a positioning method for a radio system, the method comprising:

receiving signals at a unit of the system;

applying at least one test on the received signals to select a processing operation on the signals, the operation being one of the following: a correlation processing operation, a leading edge processing operation; and

30

then effecting the operation selected.

In this way, the method of the present invention utilises the processing operation that yields the most accurate and robust measurement in the prevailing circumstances. This is particularly important when the method is used in mobile equipment that tend to
5 encounter conditions which vary considerably with time.

Preferably the method includes a test which comprises determining whether the signal level of the received signal is above a threshold value; if the level of the received signal is below the threshold value, the correlation processing operation is selected. If the level of the received signal is
10 above the threshold value, then there is testing if the leading edge gradient is above a gradient threshold value; if the leading edge gradient is below the gradient threshold, the leading edge processing operation is selected. If the leading edge gradient is above the gradient threshold value, the correlation processing operation is selected.

15 Preferably, the method comprises repeating the test application and operation steps at predetermined intervals.

Other features of the method are disclosed in the claims.

According to the present invention, there is also provided a computer program product directly loadable into the internal memory of a
20 digital computer, comprising software code portions for performing the method of the present invention when said product is run on a computer.

According to the present invention, there is also provided a computer program directly loadable into the internal memory of a digital computer, comprising software code portions for performing the method of
25 the present invention when said program is run on a computer.

According to the present invention, there is also provided a carrier, which may comprise electronic signals, for a computer program embodying the present invention.

According to the present invention, there is also provided electronic
30 distribution of a computer program product, or a computer program, or a carrier of the present invention.

According to the present invention, there is also provided positioning apparatus for a radio system, the apparatus comprising:

means to receive signals at a unit of the system;

means to apply at least one test on the received signals to select a processing operation on the signals which is one of the following: a correlation processing operation, a leading edge processing operation; and

5 means to effect the operation selected.

The present invention is applicable to time-of-arrival radio systems generally and including GPS or GSM systems, and for example using Ultra Wide Band (UWB) or Direct Sequence Spread Spectrum (DSSS) signals.

10 In order that the present invention may more readily be understood, a description is now given, by way of example only, reference being made to the accompanying drawings in which:-

Figure 1 is a flow-chart representing a positioning method provided by the present invention; and

15 Figure 2 shows a circuit configuration of an implementation of the present invention.

The present invention involves testing signals received at a unit to determine which is the processing operation most appropriate to the signals, being based on a variety of criteria and aspects of the received signals.

20 Thus, at any given time and set of circumstances, determination may result in a decision to use one particular processing method. At a later time, the form of the signal may have changed and/or the local environment may have changed, resulting in a different decision or even the same decision but for different reasons.

The method represented in Figure 1, embodying the present invention, allows the time-of-flight of a signal for accurate and robust positioning in e.g. GPS or GSM systems, for example using Ultra Wide Band (UWB) or Direct Sequence Spread Spectrum (DSSS) signals.

30 Depending on the extent of noise degradation and multipath degradation suffered by the signal in the propagation environment, either a measurement based on a leading edge technique, or a measurement

based on a correlation technique, is used in order to yield the most accurate result.

In an environment with a high level of background noise, a measurement based on a standard correlation technique yields a more accurate result, whereas in a densely populated environment with a high level of multipath degradation, a measurement based on a leading-edge technique yields a more accurate result.

The method represented by Figure 1 provides a reliable and accurate selection of a most appropriate signal processing technique at any given time for a particular set of circumstances.

The method will now be described with reference to Figure 1.

At Step 1, a receiver B receives a periodic pulse form a transmitter A. In order to obtain a pulse of sufficient (SNR) Signal/Noise Ratio for the point of inflection calculation, each period of the pulse train is coherently summed (Step 2).

For a pulse train with a period of T, coherent summing results in a pulse train constituting N pulse train periods, thereby yielding N times the original signal strength, but only \sqrt{N} times the noise, as coherent summing of pulses causes the noise to be averaged out.

A further way of improving the SNR of the pulses for the purposes of a leading-edge technique is to take the convolution of the first pulse in the pulse train with a bump function, for example a Gaussian function, of width slightly greater than the widest noise perturbation. The nose perturbations are in effect filtered out as the function averages over the width of the noise fluctuation, according to the following equation:

$$\sqrt{\frac{\sigma}{\pi}} \int e^{-\sigma(x-y)^2} f(y),$$

such that the pulse is given by $f(y)$ and the pulse width p satisfies the criterion:

$$p^2 \sigma \gg 1.$$

Step 3 performs a test to determine if the value of the received SNR has a corresponding worst-case leading edge technique range error (found

via lookup in the device memory) that is worse than the user-defined range error. The worst-case leading edge range error for various signal-to-noise ratios was taken during previous experimental measurements, this data being stored in the look-up memory.

5 Step 3 performs a test to determine the worst possible practical range error. The range error is calculated for a received pulse with a very low gradient controlled by measuring signals in the indoor environment to determine the pulse gradient that represents a non-negligible worst-case scenario for a fixed signal-to-noise ratio. The range error is calculated for
10 various predetermined values of signal-to-noise ratio (SNR), allowing the construction of a look-up table.

In normal operation, the look-up table is used in real time to provide the range error ε_1 for a particular SNR with the range error ε_1 forming the decision threshold value K , determined firstly by taking plentiful received
15 signal data throughout a particular type of environment e.g. a building. A collection of data (the lower quartile) of lowest gradient signals with the same SNR is chosen as the set of worst-case scenario signals of a given SNR. Then the mean and standard deviation range error is determined for this set of signals with the leading edge method and K is the mean value
20 within the calculated standard deviation. K is dependent on SNR as better SNR increases range error. So for various SNR, the value of K is found from experimental signal measurements.

Once the SNR of the received signal is measured, its corresponding worst-case leading edge range error is looked-up in the memory. This
25 range error is the threshold value K . Previously, the limits of range error of any positioning measurement have been set to be the value e . The value e is checked against the threshold value k . If $K < e$, Step 4 is reached, so that the error of doing worst-case leading edge is within the user-defined error e , so doing leading edge will give the worst-case error K .

30 If the SNR is less than the threshold K , Step 11 is reached, wherein the range error using a leading-edge technique is worse than ε_1 , indicating that the use of a correlation technique is selected.

When $K > e$, then Step 11 is reached. This means that the error of doing worst-case leading edge is higher than the user-defined error e . The system can only get a smaller range error by doing the correlation technique. As the system has the range error within e , step 11 i.e. the correlation technique must be implemented.

Step 11 comprises another decision point. A test is again performed to determine whether the SNR is too low for a correlation technique with correlation time T , to provide a range error value that is within the user-defined error value found from a look-up table which contains the average range error from a correlation technique for the signal of various SNR and various correlation times. The threshold range error is found from another look-up table for the correlation technique range errors for various times and SNR's. Again a look-up table based on existing data is constructed, with fields SNR, correlation range error. The average range error is found by performing a correlation technique on signals of fixed SNR and correlation time. The range of a received signal is determined via the correlation technique. The exact range is also measured between the transmitter and the receiver. The difference between the correlation estimated range and the exact range is the value of the range error for a particular SNR and correlation time. These measurements are performed many times for a transmitter and receiver placed in differing positions within the environment. The range error value used is the average of those values taken for a fixed SNR and correlation time T , and thereby is utilised to extract a range error ε_2 , given a particular value of SNR and correlation time T .

The correlation range error for a given time and SNR is found from the look-up table to be C , which is a threshold value. If the user-defined range error e is greater than C then the correlation time for the transmitted signal should be sufficient to obtain a range measurement within the user defined bounds. So the correlation technique is performed in Step 12.

If the threshold error C (found from the look-up table) is greater than the user-defined range error e , then the correlation technique probably gives a position measurement outside the user-defined bounds. Thus, to

increase the accuracy of the position measurement is to increase the correlation time, as it increases the SNR of the correlation function used for finding the time-of-flight and subsequently the position fix. This is performed in Step 13.

5 If the range error ε_2 is greater than the range error ε_1 , a new correlation time T is found from the look-up table that yields an error of at least ε_1 for a given SNR.

Should Step 4 be reached, meaning the worst-case leading edge range error for the SNR of the received signal (found from a look-up table) is less than the user-defined or system-defined range error e , Step 5 is carried out only where a power-saving mode is selected in the system.

Step 5 is a power-saving mode to Step 2. Using the stored value for the measured SNR of the received signal, go to look-up table to find the transmit time that yields the max range error e . For the next transmitted signal, the transmit time is reduced to that found in the look-up table.

15 The high value of SNR is not necessary because as range accuracy is reduced in order to save power. By transmitting a signal for a shorter time the coherently superpose signal has a lower SNR which reduces the range accuracy or increase the range error. However, transmitting a signal for a shorter time saves on signal power.

20 Step 6 is reached directly from step 4 when no power-saving mode is selected.

At Step 6, a back-up test is conducted to determine whether a leading-edge technique or correlation technique should be used.

25 The gradient of the leading edge g and the signal-to-noise ratio SNR are stored with the leading edge range error. Also, SNR of the signal and its transmit time T are stored with the average correlation method range error. At Step 7, a correlation method is chosen if, given the SNR and T of the signal, the range error j is less than the range error from the leading edge method given the gradient g and SNR of the signal.

30 At Step 8, a leading edge method is chosen if, from the look-up table, it is determined that the range error for the leading edge parameter

(i.e. SNR and gradient g) is less than the range error from the correlation technique parameters (i.e. SNR and transmit time).

At Step 6, to determine the gradient of the leading edge, a single pulse in the pulse train is used, for example the first one, and the position of the point of inflection of the leading edge is determined. As a digital waveform is unlikely to have sufficient sample points to determine the location of the point of inflection, an analogue signal is preferably used, with the gradient determined using the equation:

$$i = C \frac{dV}{dt},$$

where V is the voltage of the signal waveform C is the capacitance and i is the current.

A range error is the difference between the measured range or time-of-flight of the received signal and the exact known distance the signal travelled (which appears in the look-up table data found in an experimental phase). If the SNR is sufficiently high to have a range error which is less than the user-defined error e independent of the pulse gradient, or if the SNR is greater than a predetermined threshold X a leading-edge technique can be employed. This is shown by the flow chart moving directly from step 4 to step 10. This is possible due to the independence of the leading-edge technique from the environment.

From experimental measurements in a building, a SNR value can be found that is so high that say 95 percent of all leading edge measurements have a range error less than the system defined error e .

If SNR is very high, there is little noise on the signal. There is also the multipath effect which affects leading edge techniques much less than correlation techniques. As SNR increases, the multipath the range error decreases. If SNR is high enough, the range error is smaller than the user-defined error e for any multipath environment.

The present invention may provide significant advantages over the prior art in terms of the amount of processing required. If environment thresholds in the present invention are met, the correlation technique can

immediately be used, obviating the need for the extra processing required by the leading-edge technique.

Similarly, in some circumstances, an immediate decision to use the lead-edge technique can be made, avoiding the processing associated with finding the correlation peak.

There arise a situation where the thresholds set for utilising either the leading-edge technique or the correlation technique prove not to be sufficiently robust, due to ambiguity in the propagation environment, and the use of a back-up decision is necessary. In the case where only the correlation technique is used, the integration-time of the system can be increased. In the case where only the leading-edge technique is used, a further test on the gradient of the leading edge allows a decision to be made as to whether a leading-edge technique or a correlation technique would provide a more accurate measurement.

Figure 2 shows a software implementation of the present invention incorporating the method as described in relation to Figure 1.

Thus there is shown a CPU 20 which accomplishes a number of software routines on input signals in order to determine, for a signal received at CPU 20, whether it is to be processed by a leading-edge unit 21 or a correlation unit 22.

CPU 20 has software to test for low S/N by calculating the gradient of the signal between successive sample points. This is achieved by reference to the sampling rate of the signal which is set to a sampling space of dt by sampler 23. The value of the energy at each sample point is stored in memory 24, i.e. at sample point t_1 the signal e_1 is stored in memory, at sample point t_2 the signal energy e_2 is stored and so on.

Once all the appropriate values are stored in memory, the successive gradients are calculated by:

$$E=\{\text{Grad1}=(e_2-e_1)/dt, \text{Grad2}=(e_3-e_2)/dt, \dots, \text{Gradn}=(e_{n+1}-e_n)/dt\}.$$

If the variance of the successive gradients is high, then the S/N level is low because a noisy signal does not have a smooth edge, i.e the edge will be perturbed; so the value of successive gradients differ greatly i.e the variance is high.

In order to calculate the variance of the gradient values in the set E, the following operation 25 is performed:

$$\text{Variance} = 1/N \sum_n (\text{Grad}_n)^2 - (1/N \sum_n \text{Grad}_n)^2,$$

where N is the total number of sample points, and sum_n is a summation over all the sample points.

By testing over a standard or test sequence of signals prior to production of an implementation of a commercial product embodying the present invention, one can determine the variance value that corresponds to the limit value for doing leading-edge processing.

Leading-edge processing is done on a signal element if the S/N ratio is not too low, otherwise standard correlation is performed (26, 27).

Clearly, in a variant, the operations performed by units 21 and 23 can also be performed by CPU 20 as part of its software routines.

The present invention thereby provides a robust decision-making process, adaptive to variations in the environment, for selecting the most appropriate technique, in real time, for particular circumstances. The decision-making process is supported by the use of coherent pulse summing and convolution with a Gaussian function for improving the signal-to-noise ratio.

CLAIMS

1. Positioning method for a radio system, the method comprising:

receiving signals at a unit of the system;

5 applying at least one test on the received signals to select a processing operation on the signals, the operation being one of the following: a correlation processing operation (Step 9, 12), a leading edge processing operation (Step 10); and

then effecting the operation selected.

10 2. The method of Claim 1 wherein the test applied comprises determining whether the signal level of the received signal is above a threshold value (Step 4).

15 3. The method of Claim 2 wherein, if the level of the received signal is below the threshold value, the correlation processing operation is selected (Step 12).

20 4. The method of Claim 2 comprising, if the level of received signal is above the threshold value, testing if the leading edge gradient is above a gradient threshold value (Step 6).

25 5. The method of Claim 3 wherein, if the leading edge gradient is below the gradient threshold value, the leading edge processing operation is selected (Step 10).

30 6. The method of Claim 4 wherein, if the leading edge gradient is above the gradient threshold value, the correlation processing operation is selected (Step 9).

7. The method of any preceding claim, comprising repeating the test application and operation steps at predetermined intervals.

8. The method of any preceding claim comprising coherently superposing received pulses before the test application step.

5 9. The method of any preceding claim comprising convolution of a pulse with a bump function.

10 10. The method of any preceding claim comprising, if the signal level is below the signal level threshold, extending the receiving time period for the signal before the next/successive test application(s).

11. The method of any preceding claim comprising, before testing whether the leading edge gradient is above a threshold value, reducing the next transmit period (Step 13).

15 12. The method according to any preceding claim comprising reducing the time period for the leading edge test for operation in a power-saving mode.

20 13. The method according to any preceding claim comprising effecting the leading edge processing operation after selection with no intermediate testing or processing.

14. The method according to any preceding claim comprising measuring the gradient using the formula:-

25
$$i = \frac{Cdv}{Dt}$$

Where V = voltage of the signal waveform,

C = capacitance,

i = current

30 15. The method according to any preceding claim wherein the leading edge processing operation comprises differentiating the received signal voltage or peak and locating the zero-crossing (point of inflexion).

16. A computer program product directly loadable into the internal memory of a digital computer, comprising software code portions for performing the method of any one or more Claims 1 to 15 when said product is run on a computer.

17. A computer program directly loadable into the internal memory of a digital computer, comprising software code portions for performing the method of any one or more of Claims 1 to 15 when said program is run on a computer.

18. A carrier, which may comprise electronic signals, for a computer program of Claim 17.

19. Electronic distribution of a computer program product of Claim 16 or a computer program of Claim 17 or a carrier of Claim 18.

20. Positioning apparatus for a radio system, the apparatus comprising:

means to receive signals at a unit of the system;

means (20, 21, 22) to apply at least one test on the received signals to select a processing operation on the signals which is one of the following: a correlation processing operation, a leading edge processing operation; and

means to effect the operation selected.

21. Apparatus of Claim 20 comprising means (26) to determine whether the signal level of the received signal is above a threshold value.

22. Apparatus of Claim 21 comprising means (26) to select the correlation processing operation if the level of the received signal is below the threshold value.

23. Apparatus of Claim 22 comprising means (26) to test whether the leading edge gradient is above a gradient threshold value, if the level of the received signal is above the threshold value.

5 24. Apparatus of Claim 22 comprising means (27) to select the leading edge processing operation, if the leading edge gradient is below the gradient threshold value.

25. Apparatus of Claim 23 comprising means (27) to select the
10 correlation processing operation, if the leading edge gradient is above the gradient threshold value.

26. Apparatus of any of Claims 20 to 25, comprising means to repeat the test application and operation steps at predetermined intervals.

ABSTRACT

POSITIONING METHOD AND APPARATUS

In a GPS or GSM system using DSSS signals, accurate and robust time-of-flight signal processing is achieved by selection of leading-edge or correlation techniques based on a variety of tests and environmental conditions.

[Figure 1]

1/2

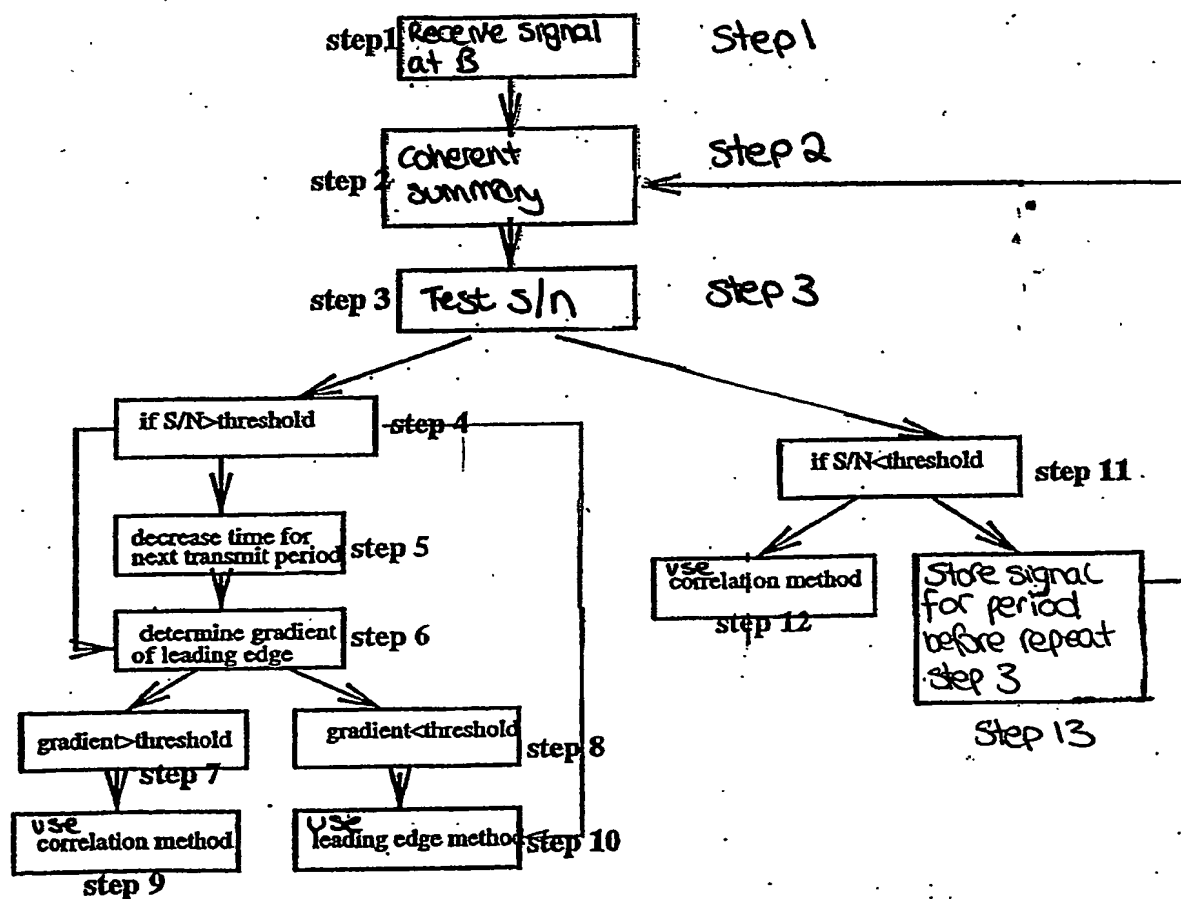


Figure 1

PHG8030214GBP

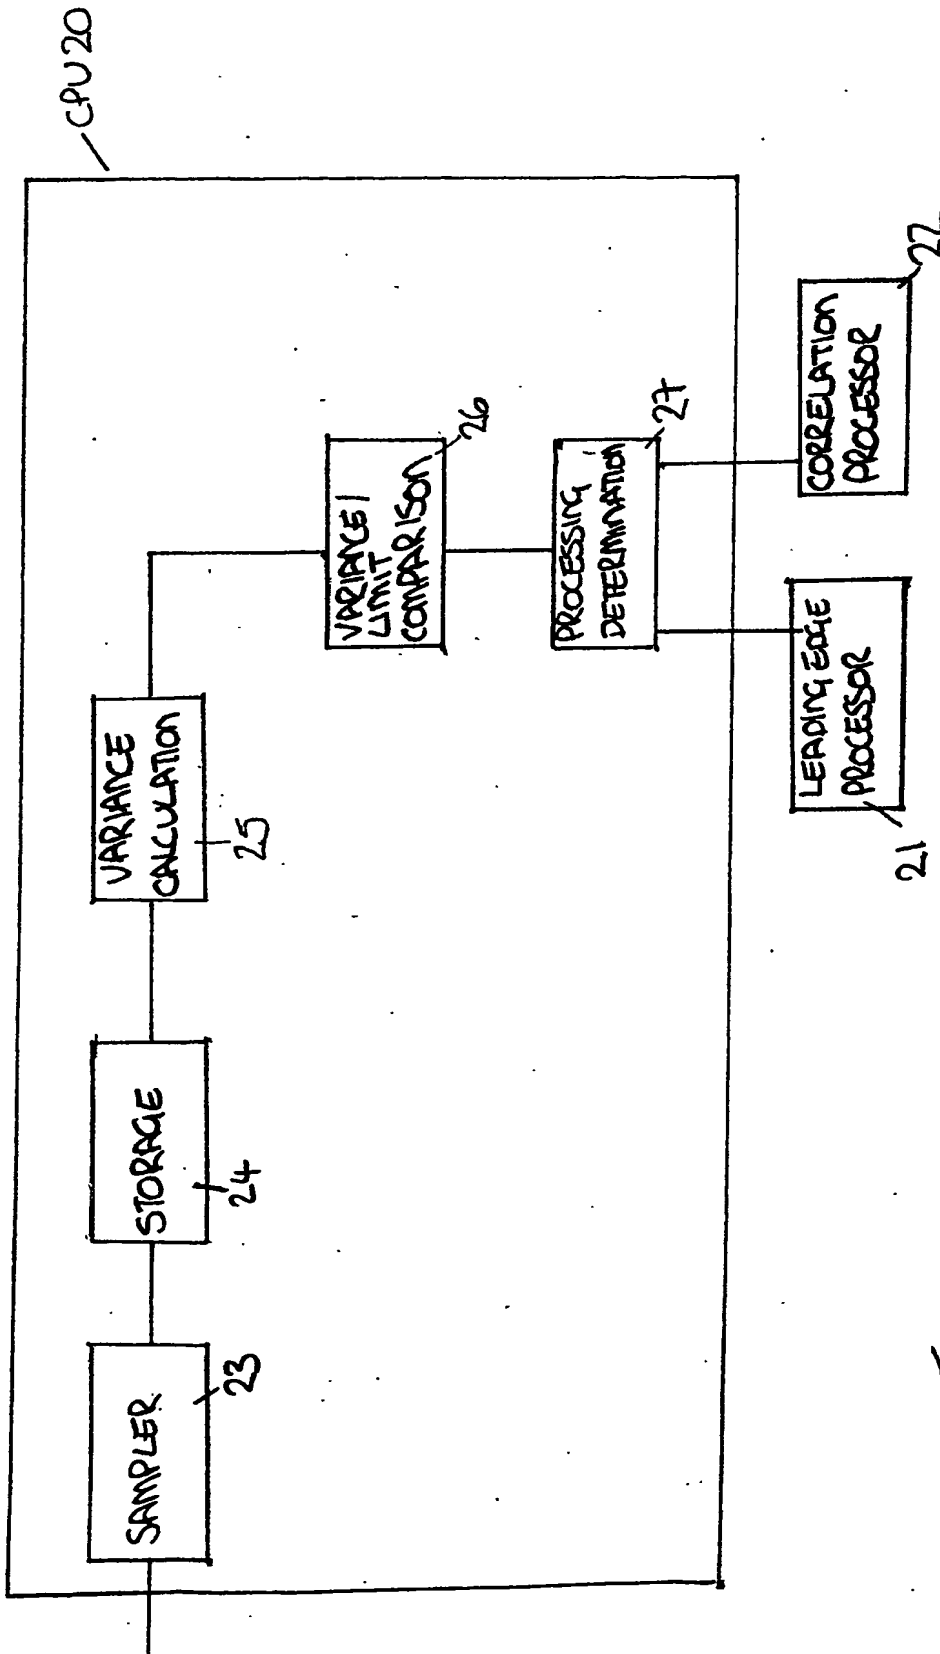


Figure 2

PCT/IB2004/052565



**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☒ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☒ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.